



NOTES:

- 1. GIRDER STOPS SHALL BE CONSTRUCTED AFTER GIRDER PLACEMENT.
- 2. ELASTOMERIC STOP PADS SHALL BE CEMENTED TO GIRDER STOP WITH APPROVED ADHESIVE.

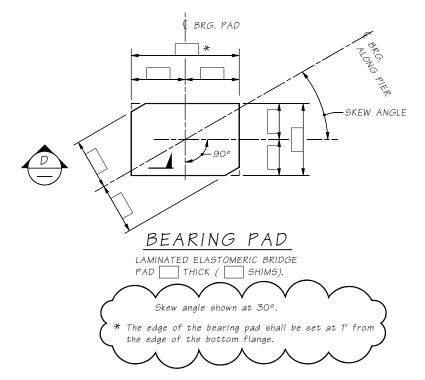

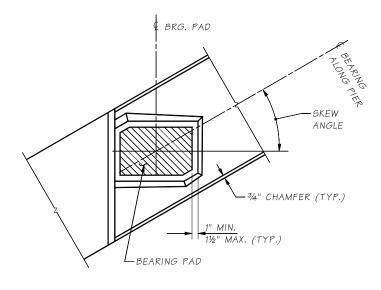

GROUT PAD DETAIL

٠.										
ž	Bridge Design Engr.	M:\ST/	ANDARDS\Girders\PT Trapezoidal Tubs\PT_TUB MISC DETAILS.MAN							
Ω	Supervisor					REGION NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
yk 	Designed By					10	WASH,			
	Checked By									
	Detailed By					TOP N	II IMPED			
	Bridge Projects Engr.					JOB NUMBER				
	Prelim, Plan By									
	Architect/Specialist	DATE	DEVISION	BV	\ DD'D				l	

BRIDGE AND STRUCTURES OFFICE

STANDARD PRESTRESSED CONCRETE GIRDERS TUB SPLICED GIRDER MISCELLANEOUS BEARING DETAILS

5.9-A4-

Tue Apr 29 13:48:53 2008